

TOP OF GABLE
30" - 8" A.F.F.

WALL-PACK FIXTURES (4 TYPICAL) MOUNTED @ 18'-0" A.F.F., TYP.

GALVANIZED CORRUGATED METAL AWINGS WITH PAINTED STEEL SUPPORT STRUCTURE.

PAINT RED STRIPE ON WALL BEHIND AWING, SEE SECTION 1.A4.0.

NON-CORROSIVE METAL SNOW GUARDS

8" SPLIT FACE C.M.U. TAILORED FOAM FILLED, PAINT SW7532 URBAN PUTTY ABOVE 4'-0" A.F.F.

FINISH FLOOR
0'-0"

24" DIA. CORRUGATED GALVANIZED PIPE ANCHORED TO STRUCTURAL PIPE COLUMN

CLEAR ANODIZED ALUMINUM STOREFRONT ENTRY SYSTEM (W/ 1" TEMP. INSULATED GREY-TINTED GLASS)

DOOR OPENER

TEMP. GLASS TO DOOR HEIGHT, TYPICAL

8" RED STRIPE BY POP SOLUTIONS TO BE INSTALLED @10'-0" A.F.F. AROUND BUMP OUT

DOOR BELL LOCATION, MOUNTED ON STOREFRONT MULLION

PROVIDE 8" TALL BLOCK STYLE NUMBERS FOR ADDRESS IN CONTRASTING COLOR

4" SWING GATE W/ DH PACE EGRESS HARDWARE WHERE REQUIRED BY LOCAL AHJ, SEE AS1.1

8" HIGH ALUMINUM TUBE FENCE

(1) 20' MANUAL ROLLING CANTILEVERED GATE, SEE SHEET AS1.1 FOR DETAIL

16" HIGH ALUMINUM TUBE FENCE

FRONT SIDE

1 ELEVATION
SCALE 1/8" = 1'-0"

ELEVATION 2
SCALE 1/8" = 1'-0"
LEFT SIDE


ELEVATION 3
SCALE 1/8" = 1'-0"
RIGHT SIDE

Annotations for Elevation 2 (Left Side):

- 8" SMOOTH-FACE C.M.U. TAILORED FOAM FILLED, PAINT SAFETY RED FROM 10'-0" A.F.F. - 10'-8" A.F.F.
- MTL. GUTTER & DOWNSPOUT BEYOND
- ROOFTOP UNIT, SEE MECHANICAL
- ROOF SLOPE
- WALL PACK LIGHT FIXTURES, SEE ELECTRICAL, TYP. MOUNT @ 14'-0" A.F.F.
- 8" SMOOTH-FACE C.M.U. TAILORED-FOAM FILLED, PAINT SW7532 URBAN SANDERLING TO 4'-0" A.F.F.
- ROOFTOP UNIT, SEE MECHANICAL
- DOWNSPOUTS TO DRAIN TO MAIN ROOF BELOW
- 8" SMOOTH-FACE C.M.U. TAILORED-FOAM FILLED, PAINT SW7532 URBAN PUTTY ABOVE 4'-0" A.F.F.
- STANDING SEAM METAL GALVANIZED ROOFING SYSTEM
- NON-CORROSIVE METAL SNOW GUARDS
- GOOSENECK FIXTURES (3 TYPICAL) MOUNTED TYP.
- CORRUGATED GALVANIZED METAL PANEL
- TSC SIGNAGE FBO, IBC.
- GALVANIZED CORRUGATED METAL AWNING WITH PAINTED STEEL SUPPORT STRUCTURE.
- 8" RED STRIPE BY POP SOLUTIONS TO BE INSTALLED @ 10'-0" A.F.F. AROUND BLUMP OUT
- 24" DIA. CORRUGATED GALVANIZED PIPE ANCHORED TO STRUCTURAL PIPE COLUMN
- 1" INSULATED TEMP. GREY TINTED GLASS IN CLEAR ANODIZED ALUM. STOREFRONT
- FINISH FLOOR 0'-0"
- BEAM BEARING HEIGHT 13'-6 1/2" SEE STRUC.
- STEEL DOCK / RAMP
- DUMPSTER
- 3' X 7' HOLLOW METAL MAIN DOOR
- 12'-0"
- C.J.


Annotations for Elevation 3 (Right Side):

- TOP OF GABLE 29'-8" A.F.F.
- GOOSENECK FIXTURES (3 TYPICAL) MOUNTED, TYP.
- CORRUGATED GALVANIZED METAL PANEL
- GALVANIZED CORRUGATED METAL AWNING WITH PAINTED STEEL SUPPORT STRUCTURE.
- TSC SIGNAGE FBO, IBC.
- BEAM BEARING HEIGHT 13'-6 1/2" SEE STRUC.
- 8" RED STRIPE BY POP SOLUTIONS TO BE INSTALLED @ 10'-0" A.F.F. AROUND BLUMP OUT
- 1" INSULATED TEMP. GREY TINTED GLASS IN CLEAR ANODIZED ALUM. STOREFRONT
- 24" DIA. CORRUGATED GALVANIZED PIPE ANCHORED TO STRUCTURAL PIPE COLUMN
- 8" HIGH ALUMINUM TUBE FENCE AROUND SIDE YARD
- 63'-8" FROM INSIDE FACE OF 8" MASONRY TO INSIDE FACE OF 6'-4" M.O.
- 6'-4" M.O.
- ROOFTOP UNIT, SEE MECHANICAL
- OUTDOOR SPEAKER FURNISHED & INSTALLED BY OTHERS @ 13'-0" A.F.F.
- SAW CUT LAST SMOOTH-FACE COURSE SLOPE TO MATCH ROOF SLOPE
- ROOFTOP UNIT, SEE MECHANICAL
- ROOFTOP UNIT, SEE MECHANICAL
- 10' X 10' AUTOMATIC INSULATED SECTIONAL DOOR W/ (2) BOLLARDS EACH SIDE
- ALUMINUM OR STEEL LADDER, STEEL LADDERS TO BE PRIMED AND PAINTED GRAY TO MATCH EXTERIOR MAIN DOOR PAINT SPECIFICATION.
- COPING TO BE PAINTED COLOR DESIGNATED BY THE SCP COLOR SCHEDULE
- METAL DOWNSPOUTS BEYOND
- DUMPSTER
- STEEL DOCK/RAMP BEYOND
- FINISH FLOOR 0'-0"
- 8" SMOOTH-FACE C.M.U. TAILORED FOAM FILLED, PAINT SW7532 URBAN PUTTY ABOVE 4'-0" A.F.F.
- 8" SMOOTH-FACE C.M.U. TAILORED FOAM FILLED, PAINT SAFETY RED FROM 10'-0" A.F.F. - 10'-8" A.F.F.
- C.J.


**OXFORD
ARCHITECTURE**

2934 Silcoo Drive
Suite 120
Nashville, TN 37204

Architecture
Planning
Interior Architecture

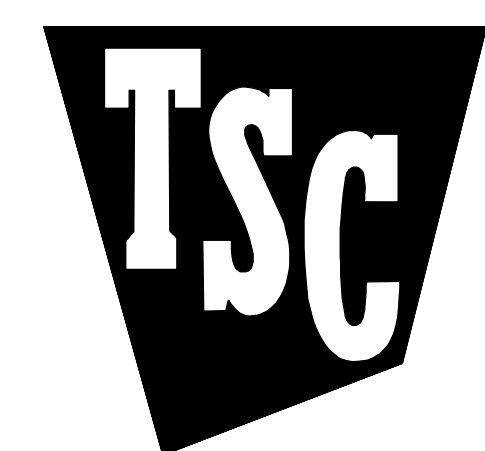

BAYFIELD,
COLORADO

Sheet Number:

A2.0